


Drager Narkomed GS

Anesthesia Machine

Equipment for the way *you* operate

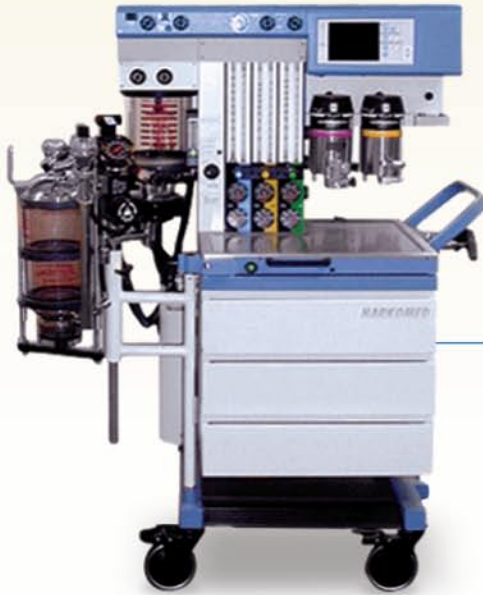

Durable anesthesia workstation that is intuitive and easy to use.

Provides next-level technology in a compact, user-friendly anesthesia system.

Technical Specifications

Physical

Dimensions	91.4 cm (w) x 135.3 cm (h) x 68.6 cm (d)
	36" (w) x 53.25" (h) x 27" (d)
Weight	170 kg (375 lbs)
Power Supply	220 / 240 or 170 volts

O₂ Monitoring

Range	10 - 100 Vol %
Resolution	1 Vol%
Accuracy	±3 Vol%

Airway Pressure Monitoring

Range	-10 - 125 cmH ₂ O Vol %
Resolution	1 cmH ₂ O
Accuracy	±3% cmH ₂ O or ±10% of reading (whichever is higher)

Tidal Volume Monitoring

Range	0.2 - 50 L
Resolution	0.1 L
Accuracy	10% or 0.1 L (whichever is higher)

Ventilator

Frequency (breaths per minute)	1 - 99
I:E ratio	4:1 - 1:4:5
Inspiratory Flow	10 - 100 L/m
Tidal Volume	50 - 1500 mL

- **Built-in monitor** displays volume, pressure and O₂ data. The monitor features a centralized three-tier alarm system that helps physicians quickly recognize critical events.
- Includes the dependable **AV2+ ventilator**, which is pressure-limited, time-cycled and volume-preset. It features pneumatic circuitry and electronic timing, plus controls for breathing rate, inspiratory to expiratory ratio, tidal volume, inspiratory flow and inspiratory pressure limit for flexible ventilation. It is capable of inverse I:E ratios with its built-in safety mechanism and is designed for an assortment of conditions. It also uses an economical amount of drive gas.
- Also includes a fresh gas system, cylinder yokes, back-up battery and O₂ flush.

Available Features

- Two or three vaporizers
- Absorber
- Scavenger system
- Sphygmomanometer